



**SMA Jack (female) Connector 2 Straight Field Replaceable  
12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.25**

**SMA2BT50-0012A / 9X**

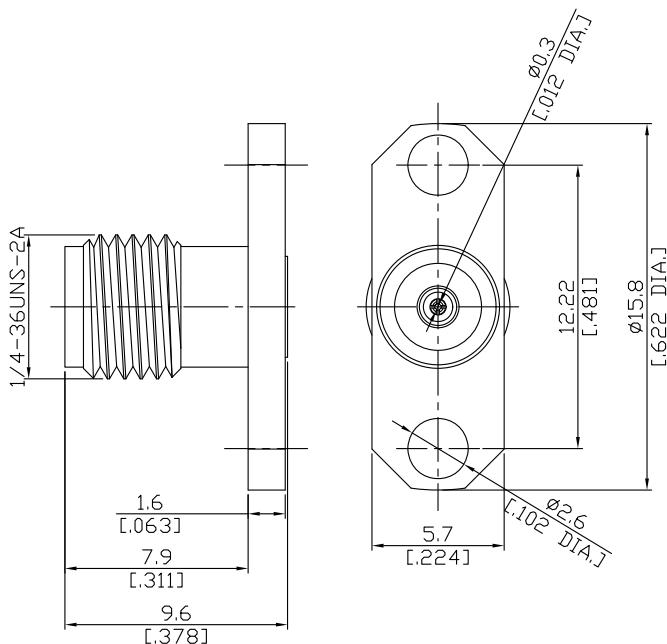

Mounting Dimension

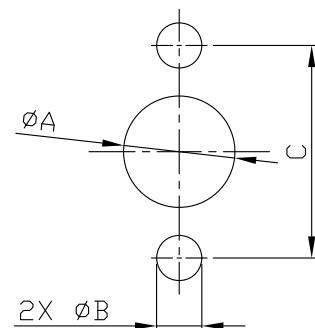

mm		inch	
Max.	Min.	Max.	Min.
A	4.2	4.1	.165
B	2.7	2.6	.106
C	12.25	12.15	.482
			.478

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to

IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

#### Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.08 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ

Outer Contact Resistance

≤ 2.0 mΩ

Test Voltage

1000 V rms

Working voltage

480 V rms

Power handling

≤ 200 W @ 2 GHz

#### Material And Plating

##### Piece Parts

##### Material

##### Plating

Centre contact

Beryllium Copper

Gold plating

(Non-magnetic nickel-phosphorus underplating)

Body

Stainless Steel

Passivated

Insulator

PTFE

SMA Jack (female) Connector 2 Straight Field Replaceable  
12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.25

## SMA2BT50-0012A / 9X

### Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	max. 1.70 Nm
Recommended Torque	0.80 Nm to 1.1 Nm

### Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

### Packing

Single or 100