
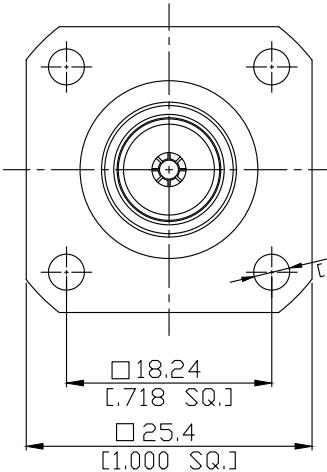


SMA Jack (Female) to N Jack (Female) Panel 4 Hole Flange Mount Adapter DC-11GHz VSWR1.15

AD-A2N25C-PF / H3-H3

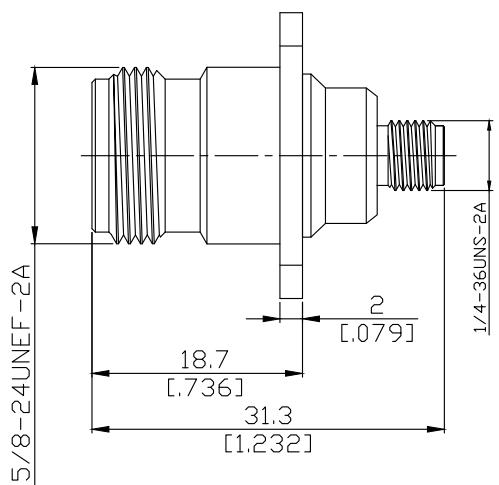

Mounting Dimensions

	mm		inch	
	Max.	Min.	Max.	Min.
A	15.9	15.8	0.626	0.622
B	3.5	3.4	0.138	0.134
C	18.3	18.2	0.720	0.717

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Mechanically compatible with
According to

SMA Side
1.85mm
IEC 61169-40

N Side
3.5mm and SMA
IEC 61169-35

Electrical Data

Impedance	50 Ω	
Frequency	DC to 11 GHz	
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)	
Insertion Loss	≤ 0.03 x √F (GHz) dB	
Insulation Resistance	≥ 5 GΩ	
Center Contact Resistance	≤ 3 mΩ, SMA side	≤ 1 mΩ, N side
Outer Contact Resistance	≤ 2 mΩ, SMA side	≤ 0.25 mΩ, N side
Test Voltage	1000 V rms	
Working Voltage	480 V rms	
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz	
RF-Leakage	≥ 100 dB up to 1 GHz	

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
12/7/2020

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

SMA Jack (Female) to N Jack (Female) Panel 4 Hole Flange Mount Adapter
 DC-11GHz VSWR1.15

AD-A2N25C-PF / H3-H3

Mechanical Data

Coupling mechanisms	SMA Side	N Side
Mating Cycles	Screw-lock	Screw-lock
Center Contact Captivation axial	≥ 500	≥ 500
Coupling Test Torque	≥ 28 N	≥ 28 N
Recommended Torque	1.7 Nm max.	1.70 Nm max.
	0.9 Nm	1.36 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Weight

N/A

Packing

Single or 100