


BNC plug (male) / FME plug (male) Straight Adapter DC-2.5 GHz

AD-B1E15B / H44-14

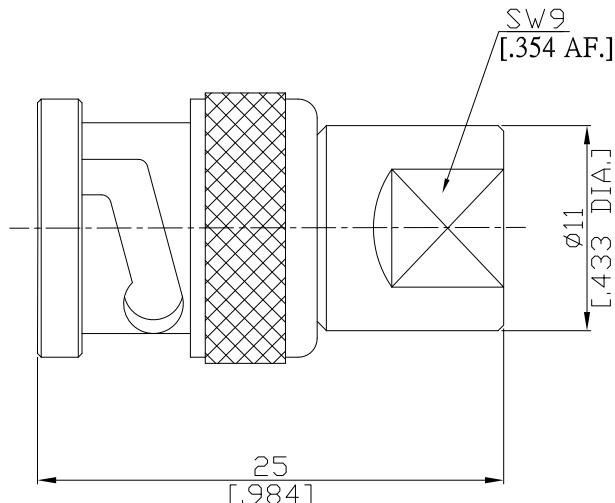

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

BNC according to	MIL-STD-348B/301
FME according to	N/A

Electrical Data

Impedance	50 Ω
Frequency	DC to 2.5 GHz

Mechanical Data

Coupling mechanisms	BNC side	FME side
Mating cycles	Bayonet-lock	Screw-lock
Coupling nut retention	≥ 500	≥ 300
Center contact captivation: axial	N/A	N/A
Coupling test torque	≥ 27 N	≥ 28 N
Recommended torque	N/A	max. 2 Nm
	N/A	N/A

Environmental Data

Temperature range	-65°C to +125°C
RoHS	compliant

Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (FME)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
12/7/2020

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/1