


N jack (female) / BNC jack (female) Straight Adapter
DC-4 GHz VSWR 1.20

AD-N2B25A / 94-94

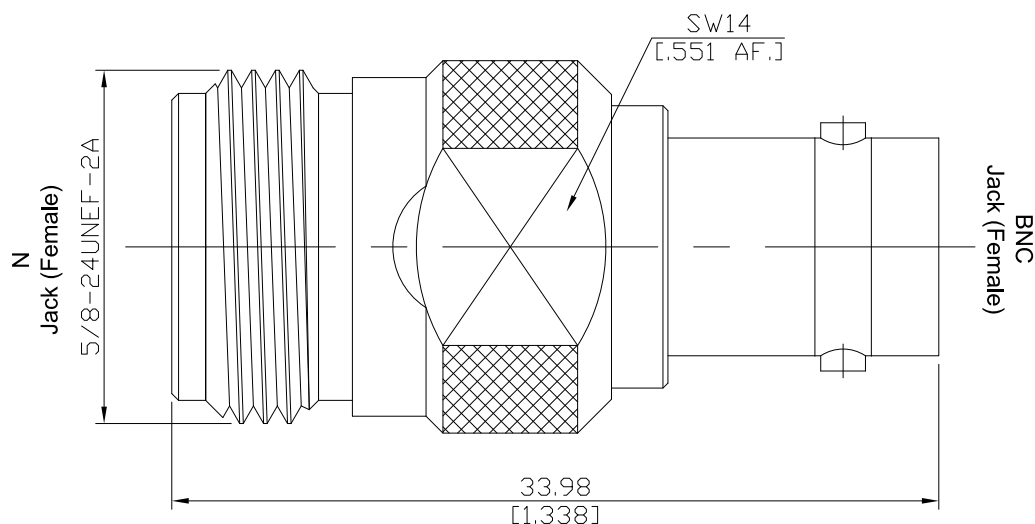

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

BNC according to

IEC 61169-8; CECC 22120; MIL-PRF-39012; MIL-STD-348B/301; BS 9210 N 004

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 × √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ, N side side;

≤ 1.5 mΩ, BNC side

Outer contact resistance

≤ 0.25 mΩ, N side side;

≤ 1 mΩ, BNC side

Working voltage

400 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

80 W typ. @ 2 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Piece Parts (BNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

N jack (female) / BNC jack (female) Straight Adapter
DC-4 GHz VSWR 1.20

AD-N2B25A / 94-94

Mechanical Data

	N side	BNC side
Coupling mechanisms	Screw-lock	Bayonet-lock
Mating cycles	≥ 500	≥ 500
Center contact captivation: axial	≥ 28 N	≥ 28 N
Coupling test torque	max. 1.7 Nm	N/A
Recommended torque	1.0 Nm	N/A

Environmental Data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100