



N Jack bulkhead adapter N Jack(female)/N Jack(female)
With Epoxy Capivate DC-12GHz VSWR1.20

AD-N2N25A-BH-EC / 90-90

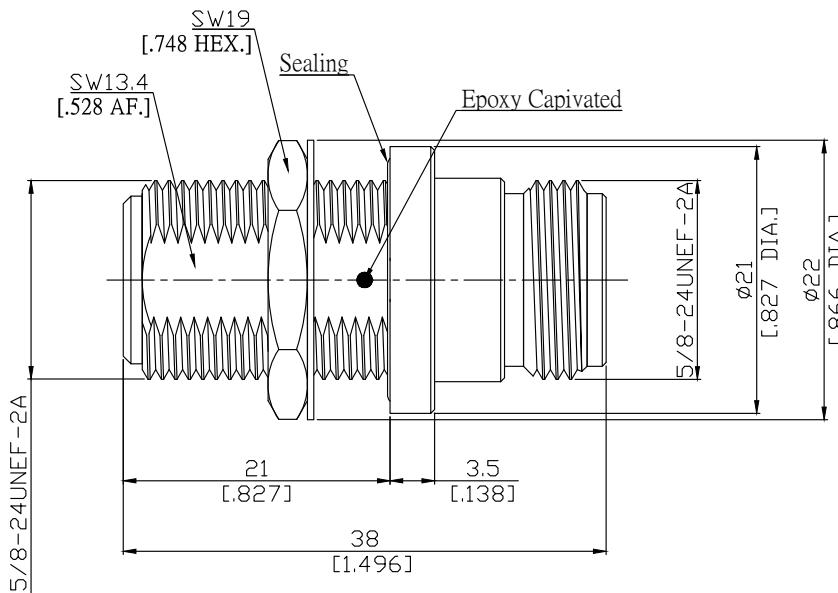

Mounting Dimensions

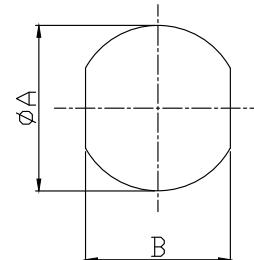

mm		inch	
Max.	Min.	Max.	Min.
A	15.75	15.7	.620
B	13.5	13.45	.531
			.530

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 61169-8; MIL-STD-348B/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 12 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.8 dB)

Insertion Loss

≤ 0.1 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ

Outer contact resistance

≤ 0.25 mΩ

Working voltage

500 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

1000 W @ 1 GHz

700 W @ 2 GHz

RF-leakage

≥ 128 dB @ DC to 1 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Silver
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Brass	Silver
Washer	Brass	Silver
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Silver
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-
Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

**N Jack bulkhead adapter N Jack(female)/N Jack(female)
With Epoxy Capivate DC-12GHz VSWR1.20**

AD-N2N25A-BH-EC / 90-90

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	min. 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65 °C to +165 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100