


N jack (female) / SMB jack (female)
Straight Adaptor DC-4 GHz VSWR≤ 1.17

AD-N2S25A / H4-H1

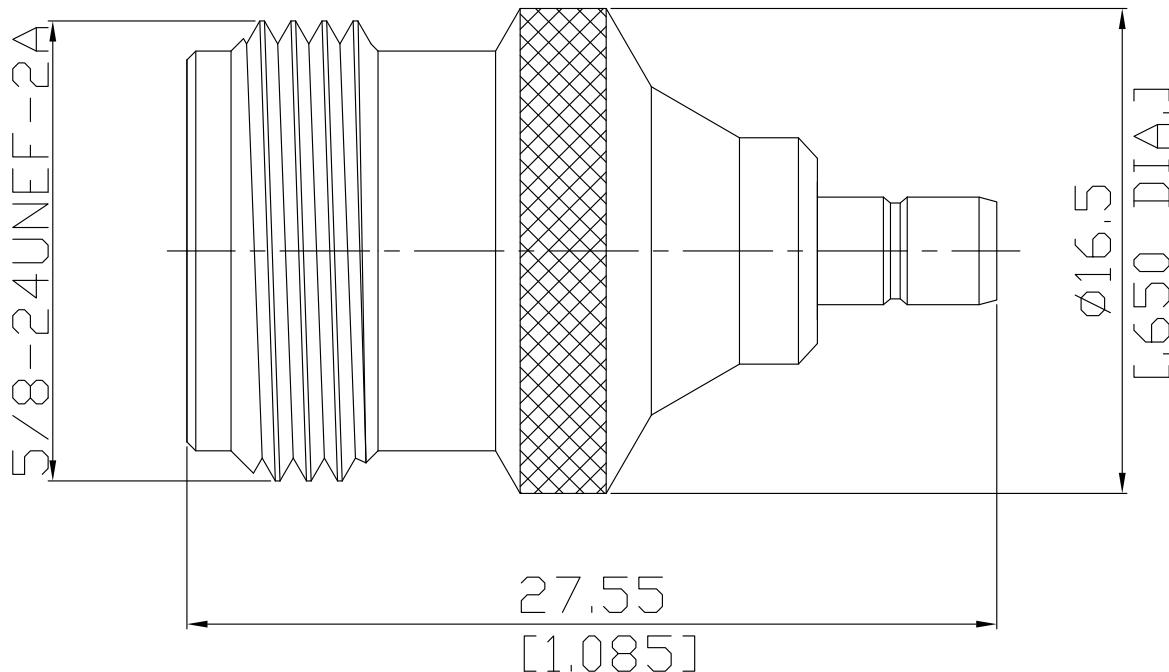

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to

IEC 61169-16; MIL-STD-348B/304

SMB according to

IEC 60169-10; MIL-STD-348B/311

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR

≤ 1.17 (> 22 dB)

Insertion loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 1 GΩ

Center contact resistance

≤ 1 mΩ, N side

≤ 5 mΩ, SMB side

Outer contact resistance

≤ 0.25 mΩ, N side

≤ 2.5 mΩ, SMB side

Test voltage

750 V rms, 50 Hz, at sea level

Working voltage

≤ 250 V rms, 50 Hz, at sea level

Contact current

1.5 A DC typ.

RF-leakage

≥ 55 dB up to 1 GHz

N jack (female) / SMB jack (female)
Straight Adaptor DC-4 GHz VSWR≤ 1.17

AD-N2S25A / H4-H1

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Piece Parts (SMB)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

Mechanical Data

Coupling mechanisms	SMB side	N side
Mating cycles	Snap-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Engagement force	≥ 10N	≥ 10N
Disengagement force	≥ 63 N	N/A
Coupling test torque	8 N min. to 63 N max.	N/A
Recommended torque	N/A	max. 1.7 Nm
	N/A	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100