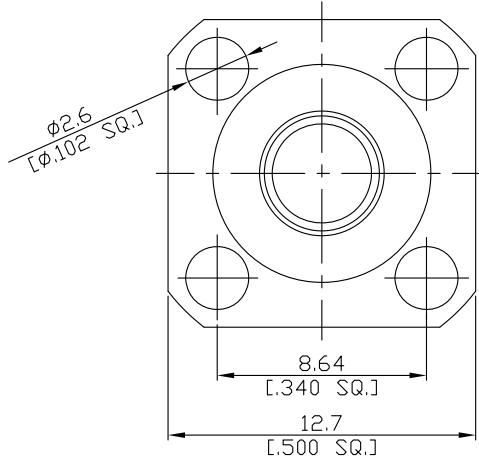
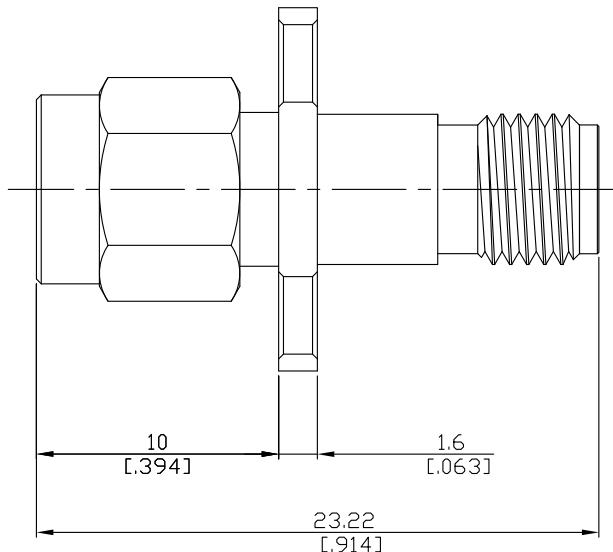


Precision SMA plug (male) / Precision SMA jack (female)  
 Panel 4 Hole Flange Mount Adapte DC-27 GHz, VSWR ≤ 1.15

**AD-PCA1PCA25A-PF / 911-91**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 27 GHz
VSWR (Return Loss)	≤ 1.15 (> 23.13 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Insulation resistance	≤ 3 mΩ
Center contact resistance	≤ 2 mΩ
Outer contact resistance	1000 V rms
Test voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

**Material And Plating**

Piece Parts (Precision SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Brass	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Piece Parts (Precision SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Brass	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Insulator	PTFE	

Precision SMA plug (male) / Precision SMA jack (female)  
Panel 4 Hole Flange Mount Adapte DC-27 GHz, VSWR  $\leq$  1.15

AD-PCA1PCA25A-PF / 911-91

## Mechanical Data

## Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100