


2.4mm Plug (Male) to 2.92mm Jack (Female) Adapter  
DC-40GHz VSWR1.15

## AD-Q1K25A / 9XX-9X

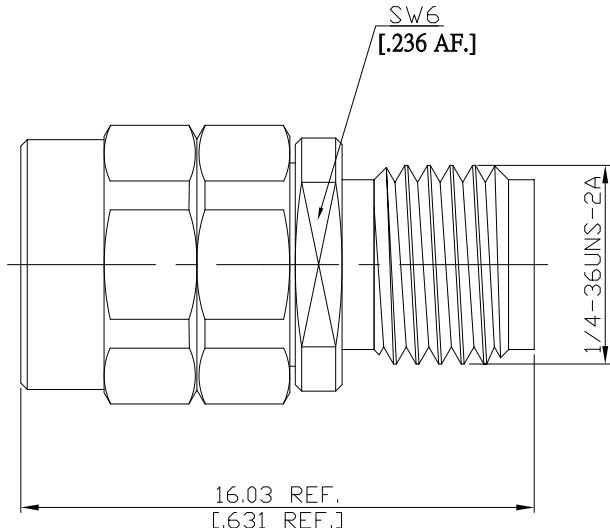

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

Mechanically compatible with  
According to

2.4mm Side  
1.85mm  
IEC 61169-40, IEEE Std 287

2.92mm Side  
3.5mm and SMA  
IEC 61169-35, IEEE Std 287

### Electrical Data

Impedance  
Frequency  
VSWR (Return Loss)  
Insertion Loss  
Insulation Resistance  
Test Voltage (at sea level)  
Working Voltage (at sea level)  
RF Leakage  
Power Handling

50 Ω  
DC to 40 GHz  
≤ 1.15 (≥ 23.13 dB)  
≤ 0.05 x √F (GHz) dB  
≥ 5 GΩ  
500 V rms  
150 V rms  
≥ 100 dB up to 1 GHz  
18W

### Material And Plating

Piece Parts (2.4mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (2.92mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	

2.4mm Plug (Male) to 2.92mm Jack (Female) Adapter  
DC-40GHz VSWR1.15

## AD-Q1K25A / 9XX-9X

## Mechanical Data

Coupling mechanisms	2.4mm Side	2.92mm Side
Mating Cycles	Screw-lock	Screw-lock
Center Contact Captivation	≥ 500	≥ 500
Coupling Test Torque	≥ 20 N	≥ 20 N
Recommended Torque	1.65 Nm max.	1.70 Nm max.
	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

## Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Standard	Single or 100
----------	---------------