
INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
–	INITIAL RELEASE	JAN/22/2024	

Rosnol P/N		Length (mm)
A1E50-EF402-A1E50-750A/ 18G		750
A1E50-EF402-A1E50-1000A/ 18G		1000
A1E50-EF402-A1E50-1500A/ 18G		1500
Frequency	**VSWR Max.**	**Insertion Loss Max.**
18 GHz	1.25	≤ 0.00227 (dB/mm) * L (mm) + 0.1 (dB)

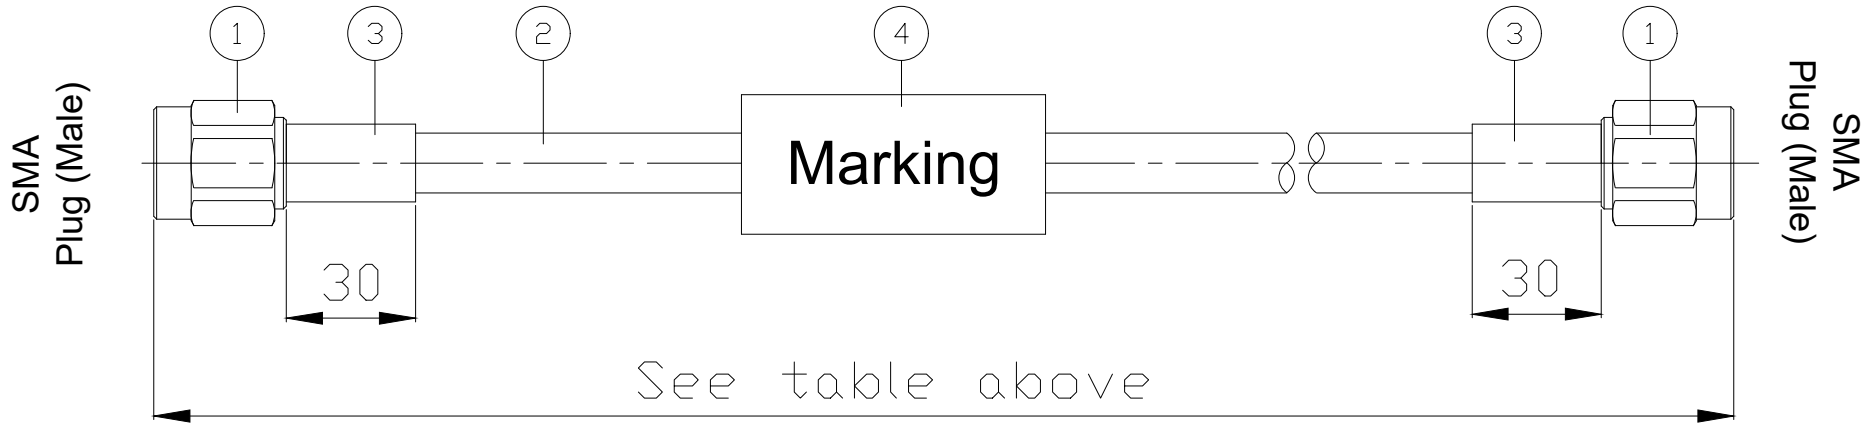

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-18 GHz
A1E50-EF402-A1E50-XXXA/18G

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M
4	LABEL HEAT SHRINK TUBE	HST-W-D5-125C-G	1	EA
3	HEAT SHRINK TUBE	HST-B-D5-125C	2X 30	mm
2	CABLE	ROSNOL EF402A	XXX	mm
1	SMA SOLDER PLUG	SMA1E50-0141A/91X	1	EA

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° ± 1°

CUSTOMER | REV – | UNIT mm [inch]

APPROVED | DATE

DRAWN | DATE

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
SMA Plug (Male) to SMA Plug (Male)
XXX Meter Cable Assembly for EF402 Cable

DRAWING NO.
A1E50-EF402-A1E50-XXXA/18G