


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
A1E50-RSF141FEP-A1E50-1000A/18G		1000
A1E50-RSF141FEP-A1E50-2000A/18G		2000
Frequency	VSWR Max.	Insertion Loss Max.
18 GHz	1.25	$\leq 0.0035 \text{ (dB/mm)} * L \text{ (mm)} + 0.1 \text{ (dB)}$


SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	FEB/26/2024	



WITHOUT ADHESIVE TUBING ,
BOTH ENDS.

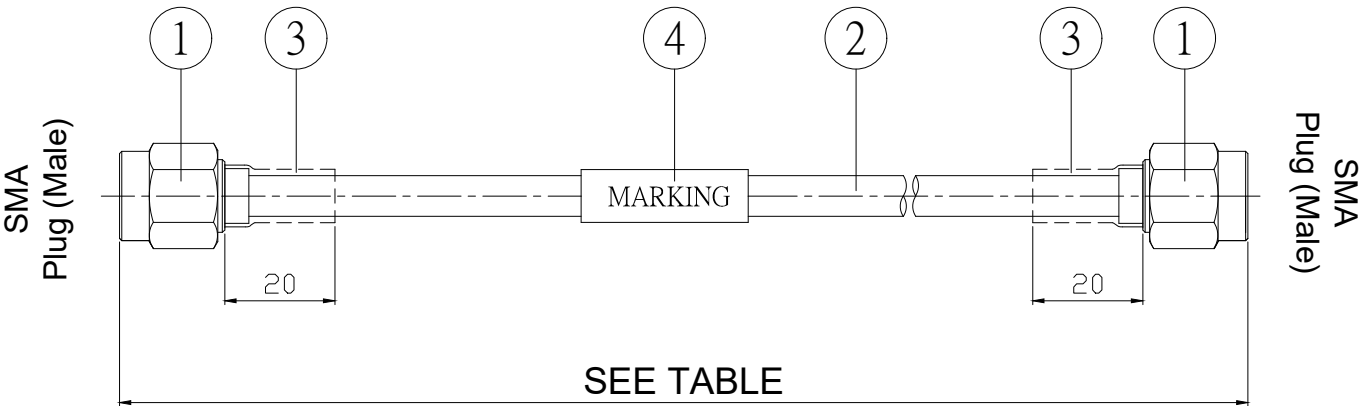

4	LABEL HEAT SHRINK TUBE	HST-W-D4-125C-G	1	EA	DIMENSION ARE IN MM [INCH]		REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D6.4-125C	2X 20	mm	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	DATE		
2	CABLE	ROSNOL RSF141FEP	XXX	mm				
1	SMA SOLDER PLUG	SMA1E50-EZ141A/91X	2	EA		DRAWN	DATE	
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL 

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
SMA Plug (Male) to SMA Plug (Male) XXX Meter Cable Assembly for RSF141FEP Cable
DRAWING NO.
A1E50-RSF141FEP-A1E50-XXA/18G