


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JUN/09/2025	

Rosnol P/N	Length (mm)	
A1K59-MP790A-A1K59-1000C/ 18G	1000	
A1K59-MP790A-A1K59-2000C/ 18G	2000	
A1K59-MP790A-A1K59-3000C/ 18G	3000	
Frequency	VSWR Max.	Insertion Loss Max. (dB)
18 GHz	1.3	$\leq 0.00068 \text{ (dB/mm)} * L \text{ (mm)} + 0.21 * \sqrt{f}$

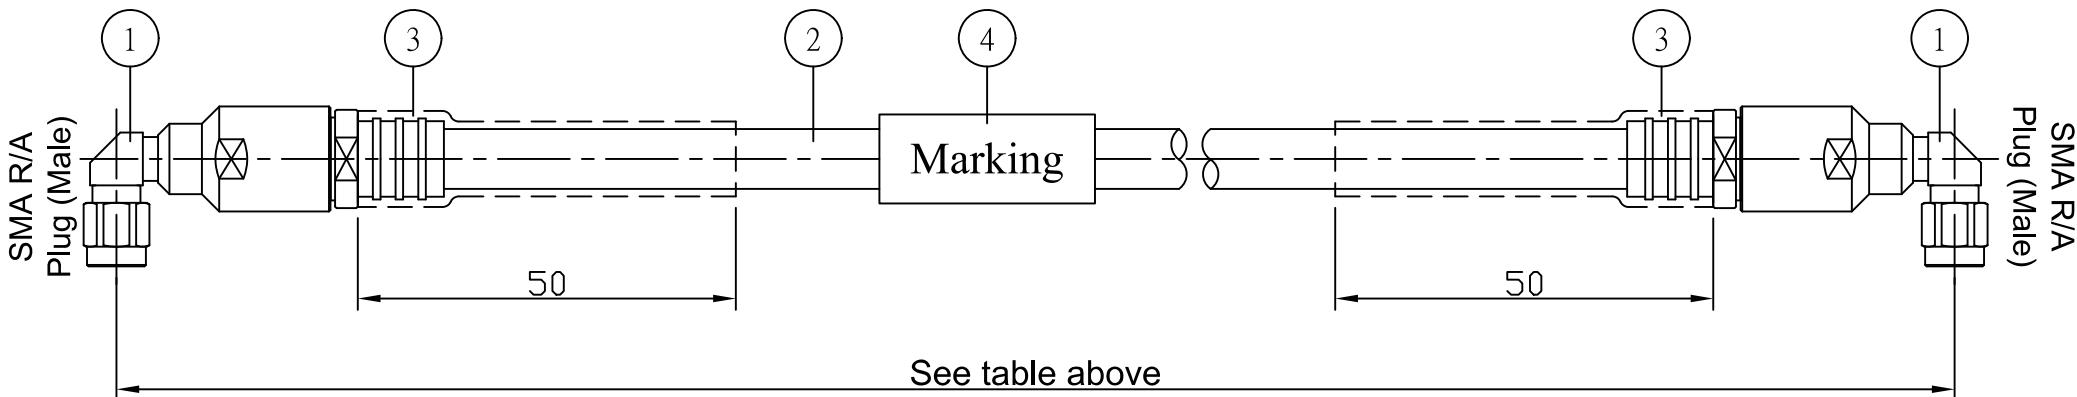

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- 2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 18 GHz
A1K59-MP790A-A1K59-XXX/18G
WW/YY - SERIAL NUMBER
- 3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm FOR } L \leq 300\text{mm} ; \pm 1\% \text{ FOR } L > 300\text{mm}$

4	LABEL HEAT SHRINK TUBE	HST-W-D12-125C	1	EA	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	CUSTOMER	REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D12.7-125C-G	2X 50	mm		APPROVED	DATE	mm [inch]
2	CABLE	ROSNOL MP790A Cable	See table above	mm		DRAWN	DATE	
1	SMA R/A Plug (Male)	SMA1K59-MP790A/9XX	2	EA				
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL 
RF/Microwave Technology
www.rosnol.com
info@rosnol.com

N-CAGE Code: SFKK0

TITLE
SMA R/A Plug (Male) to SMA R/A Plug (Male)
XXX Meter Cable Assembly for MP790A Cable
DRAWING NO.
A1K59-MP790A-A1K59-XXX/18G