


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	DEC/09/2025	

Rosnol P/N		Length (mm)
N1C50-RG142-N1C50-500A/4G		500
N1C50-RG142-N1C50-1000A/4G		1000
N1C50-RG142-N1C50-3000A/4G		3000
N1C50-RG142-N1C50-5000A/4G		5000
Frequency	VSWR Max.	Insertion Loss Max. (dB)
4 GHz	1.25	$\leq 0.000945 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

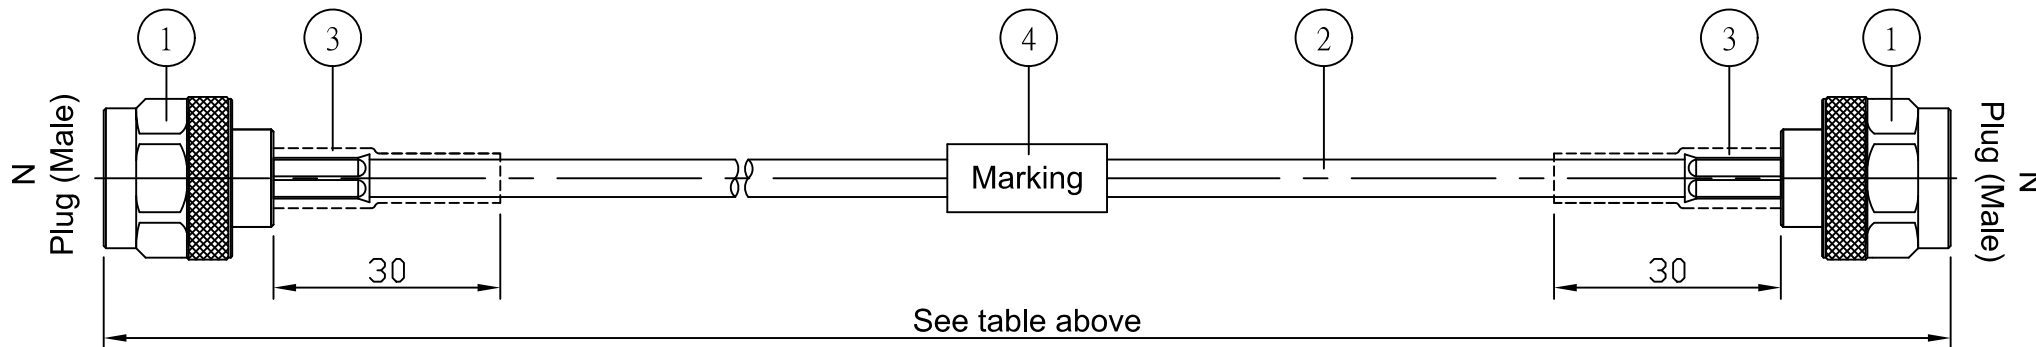

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
 ROSNOL DC- 4 GHz
 N1C50-RG142-N1C50-XXX/4G
 WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT	
4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° $\pm 1^\circ$	-	-	mm [inch]	
3	HEAT SHRINK TUBE	HST-B-D8-125C	2X 30	mm		APPROVED	DATE		
2	CABLE	RG-142B/U Cable	See table above	mm		DRAWN	DATE		
1	N CRIMP PLUG	N1C50-G142A/133	2	EA					



RF/Microwave Technology
 www.rosnol.com
 info@rosnol.com
 N-CAGE Code: SFKK0

TITLE
 N Plug (Male) to N Plug (Male)
 XXX Meter Cable Assembly for RG-142B/U Cable

DRAWING NO.
N1C50-RG142-N1C50-XXX/4G