


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N	Length (mm)	
N1C50-RG214-N1C50-3000A/1G	3000	
Frequency	VSWR Max.	Insertion Loss Max.
1 GHz	1.25	$\leq 0.00028 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f(\text{GHz})}$

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/7/2025	

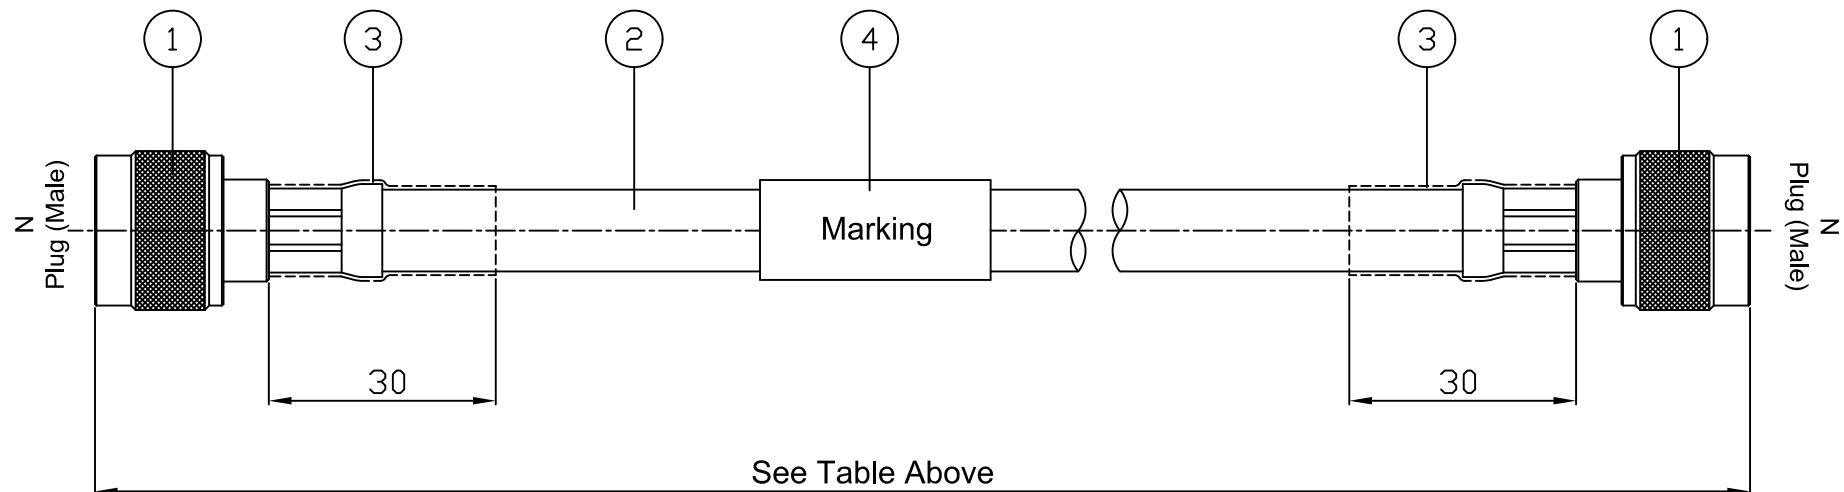

See Table Above

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- 2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 1 GHz
N1C50-RG214-N1C50-3000A/1G
WW/YY SERIAL NUMBER
- 3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

4	LABEL HEAT SHRINK TUBE	HST-W-D15-125C	1	EA	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	CUSTOMER	REV -	UNIT mm [inch]
3	HEAT SHRINK TUBE	HST-B-D15-125C	2X 30	mm				
2	CABLE	ROSNOL RG214 Cable	3000	mm				
1	N Crimp Plug	N1C50-G214A/144	2	EA				
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL 
RF/Microwave Technology
www.rosnol.com
info@rosnol.com

N-CAGE Code: SFKK0

TITLE
N Plug (Male) to N Plug (Male)
3 Meter Cable Assembly for RG214 Cable

DRAWING NO.
N1C50-RG214-N1C50-3000A/1G