


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
N1K50-MT902A-N1K50-3000A/2G		3000
Frequency	VSWR Max.	Insertion Loss Max. (dB)
2 GHz	1.2	$\leq 0.000206 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JUL/3/2025	

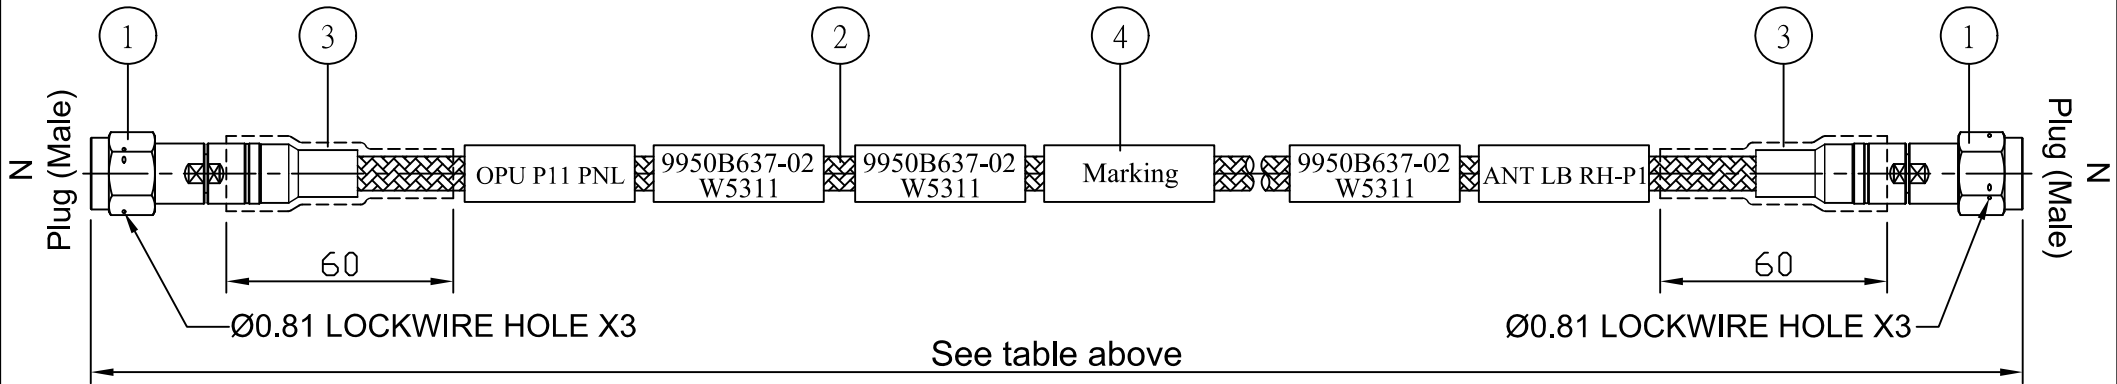

- NOTES:
- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
 - MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 2 GHz
N1K50-MT902A-N1K50-3000A/2G_W5311
WW/YY - SERIAL NUMBER
 - ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
±3 mm FOR L ≤ 300mm ; ±1% FOR L > 300mm

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

4	LABEL HEAT SHRINK TUBE	HST-W-D12-125C	1	EA	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D16-125C-G	2X 60	mm	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	APPROVED	DATE	mm [inch]
2	CABLE	Rosnol MT902A Cable	3000	mm				
1	N SOLDER CLAMP PLUG	N1K50-MT902A/9XX	2	EA		DRAWN	DATE	
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
N Plug (Male) to N Plug (Male)
3 Meter Cable Assembly for MT902A Cable

DRAWING NO.
N1K50-MT902A-N1K50-3000A/2G